


Characteristics

- Material**
- Sheet Steel (EN 10130 DC01)
    - Body : 1.2 / 1.5 mm
    - Door : 1.2 / 1.5 mm
  - Galvanized Steel (EN 10346 DX51D+Z)
    - Mounting plate : 1.5 - 2 mm
- Surface Finishing**
- RAL7035w powder coating
- IP Rating**
- Single door enclosures
- IP66 (TS 3033, EN 60529)
- Double door enclosures
- IP55 (TS 3033, EN 60529)
- Others**
- Fully welded construction
  - Solid / glazed door
  - Foamed-in door PU sealing gasket
  - 155° concealed hinges
  - 5mm Double-bit insert polyamide lock
  - Top and bottom gland plates
  - One piece PE gasket for gland plate



On Request

- Special sizes
- Special colour
- Pre-punching

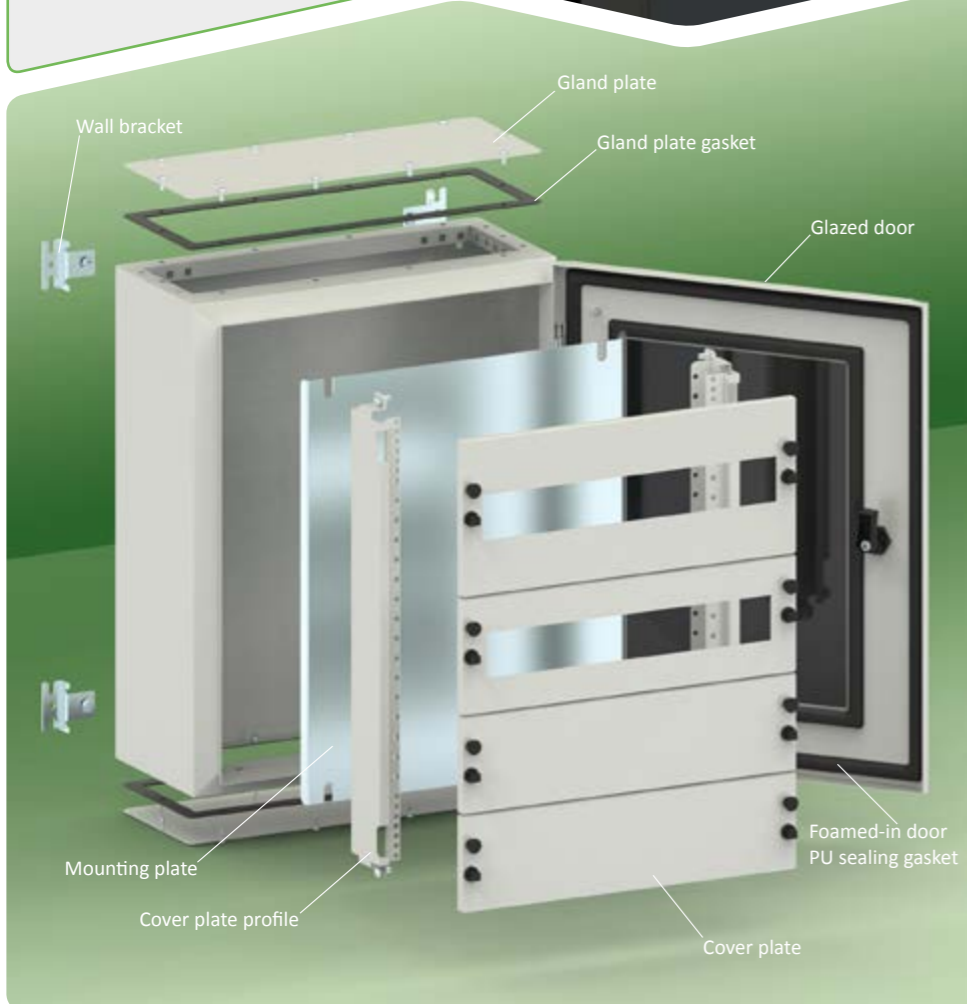

Supply Includes


- Body
- Door (Select ≈ **K**)
- Mounting plate (Option ≈ **M**)
- Cover plate set (Option ≈ **P**)
- Hinged inner door (Option ≈ **P**)
- 2 pcs gland plates with gasket
- 4/6 pcs wall brackets

Complementary Accessories

- Rain canopy
- Support base
- DIN rail
- Cover plate and profiles
- Standoff
- Door inside mounting profile
- Door stay
- Pole fitting set
- Plastic cover plate
- Special locks and keys
- Earthing cable

Width A	Height B	Depth C	Reference	Door pcs	Lock Type *	Lock pcs	Hinge pcs	Wall Bracket pcs	Weight ** kg	Application Options				
										Glazed Door Y/N	Cover Plate System Y/N	Standard Cover Plate Set Y/N	Rain Canopy Y/N	Support Base Y/N
200	300	150	EKO xxx 020315	1	C	1	2	4	4.2	-	-	-	-	-
300	300	150	EKO xxx 030315	1	C	1	2	4	5.6	✓	-	-	✓	✓
		200	EKO xxx 030320	1	C	1	2	4	6.3	✓	✓	✓	✓	✓
	400	150	EKO xxx 030415	1	C	1	2	4	7.0	✓	-	-	✓	✓
		200	EKO xxx 030420	1	C	1	2	4	7.9	✓	✓	✓	✓	✓
400	300	150	EKO xxx 040315	1	C	1	2	4	7.1	✓	-	-	✓	✓
		200	EKO xxx 040420	1	C	1	2	4	9.8	✓	✓	✓	✓	✓
	500	150	EKO xxx 040515	1	C	1	2	4	10.5	✓	-	-	✓	✓
		200	EKO xxx 040520	1	C	1	2	4	11.6	✓	✓	✓	✓	✓
	600	200	EKO xxx 040620	1	C	2	2	4	13.5	✓	✓	✓	✓	✓
		300	EKO xxx 040630	1	C	2	2	4	15.6	✓	✓	✓	✓	✓
500	500	200	EKO xxx 050520	1	C	1	2	4	14.1	✓	✓	✓	✓	✓
		600	EKO xxx 050620	1	C	2	2	4	16.2	✓	✓	✓	✓	✓
	700	200	EKO xxx 050720	1	C	2	3	4	18.5	✓	✓	✓	✓	✓
		300	EKO xxx 050730	1	C	2	3	4	21.2	✓	✓	✓	✓	✓
600	400	200	EKO xxx 060420	1	C	1	2	4	14.9	✓	✓	✓	✓	✓
		600	EKO xxx 060620	1	C	2	2	4	20.6	✓	✓	✓	✓	✓
	300	200	EKO xxx 060630	1	C	2	2	4	23.2	✓	✓	✓	✓	✓
		800	200	EKO xxx 060820	1	C	2	3	6	26.2	✓	✓	✓	✓
	1000	300	EKO xxx 060830	1	C	2	3	6	29.0	✓	✓	✓	✓	✓
		200	EKO xxx 061020	1	C	2	3	6	30.8	✓	✓	✓	✓	✓
800	600	300	EKO xxx 061030	1	C	2	3	6	35.2	✓	✓	✓	✓	✓
		1200	EKO xxx 061230	1	C	2	4	6	39.7	✓	✓	✓	✓	✓
	1000	600	EKO xxx 080620	1	C	2	3	6	26.3	✓	-	-	✓	✓
		300	EKO xxx 080630	2	I	1	4	6	28.3	✓	-	-	✓	✓
1000	1000	300	EKO xxx 081030	1	C	2	4	6	45.3	✓	-	-	✓	✓
		1200	EKO xxx 081230	1	C	2	4	6	59.0	✓	-	-	✓	✓
	1200	600	300	EKO xxx 106030	2	I	1	4+4	6	50.0	-	-	-	✓
1000			EKO xxx 101030	2	I	1	4+4	6	60.0	-	-	-	✓	✓
1200		300	EKO xxx 101230	2	I	1	4+4	6	70.0	-	-	-	✓	✓
1200	1200	300	EKO xxx 121230	2	I	1	4+4	6	80.0	-	-	-	✓	✓

\* C: Quarter Turn I: Escutcheon Rod-latch  
 \*\* For EKO 110 GG YY DD

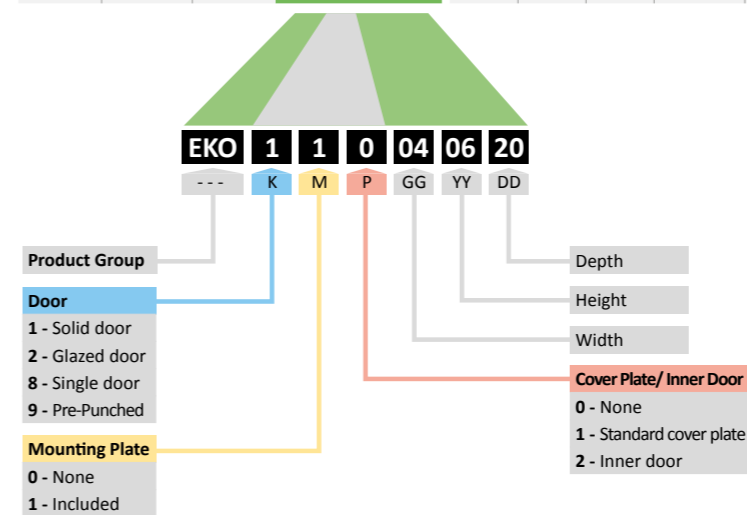

WALL MOUNTED ENCLOSURES

WALL MOUNTED ENCLOSURES